

VMFMT5BP-1000M/2000M-15M-NF/NF


FEATURES

- ◆ Designed for Lab Use and Test Applications
- ◆ Manual and Digitally Controlled Versions Available

SPECIFICATIONS

| Parameter | Unit | Min. | Typ. | Max. | Test Conditions |
|------------------------|------|------------|------|------|-----------------|
| Tuning Frequency Range | MHz | 1000 | - | 2000 | |
| 3dB BW | % | - | 1 | - | |
| Insertion Loss | dB | - | - | 3.0 | @1500MHz |
| 30dB:3dB Ratio | :1 | - | - | 2.1 | |
| 50dB:3dB Ratio | :1 | - | - | 3.2 | |
| VSWR | :1 | - | - | 1.5 | |
| Number of Sections | - | 5 | | | |
| Impedance | Ω | 50 | | | |
| Power Handling | W | 100 | | | CW |
| Control Interface | - | RS485 | | | |
| Voltage Supply | V | 28 | | | |
| Operation Temperature | °C | 10 | - | 40 | |
| Tuning Time | s | - | - | 10 | |
| RF Connector | - | N-K | | | |
| Weight | Kg | 4.1 | | | |
| Size | mm | 400*161*79 | | | |

OUTLINE DRAWING

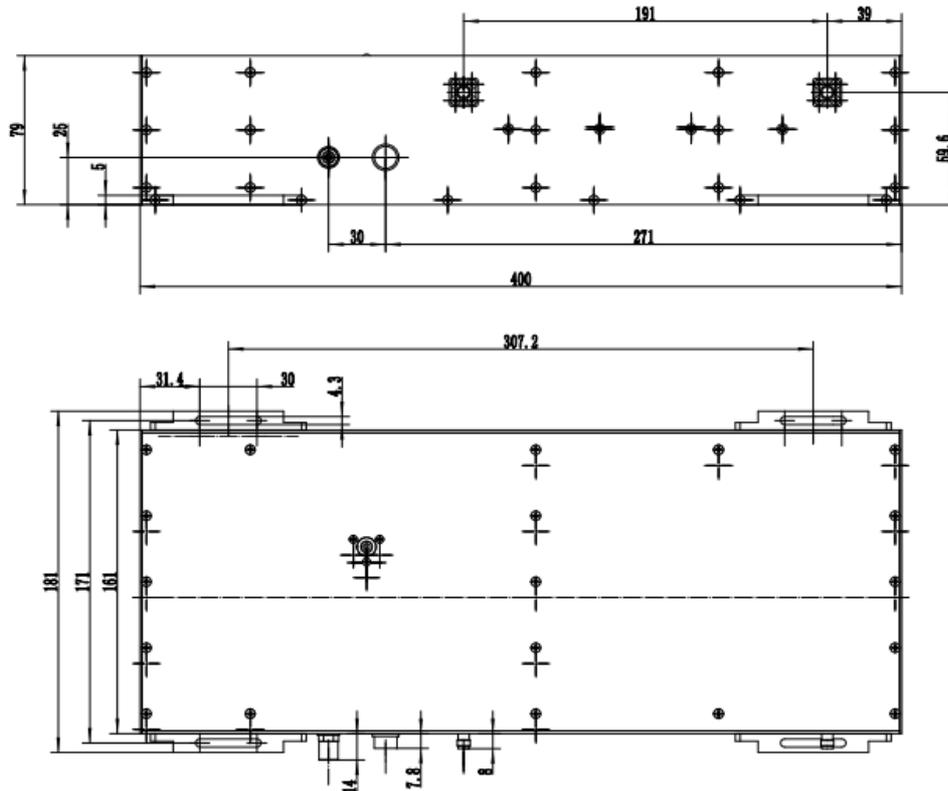

INTERFACE DEFINITION

| | | | | | |
|-------------------|--------|--------|------|--------|--------|
| PIN Number | 1 | 2 | 4 | 5 | 6 |
| Function | +28V | PGND | SGND | RX485- | RX485+ |
| PIN Number | 7 | 8 | 9 | 11 | 12 |
| PIN Number | TX485- | TX485- | / | / | / |

RS485 CONTROL DEFINITION

Serial port baud rate: 115200kbps

Set Frequency (MHz): Total 6 byte sent

[0xFE](#) [0x00](#) [0x00](#) [0x Frequency×10 High Byte](#) [0x Frequency×10 Low Byte](#) [0xAA](#)

e.g.:

Set Frequency: 1000MHz

1000 * 10=10000 (2710)

Sending Data: 0xFE 0x00 0x00 0x27 0x10 0xAA

Set Frequency: 2000MHz

2000 * 10= 20000 (4E20)

Sending Data: 0xFE 0x00 0x00 0x4E 0x20 0xAA

Set Frequency: 3000MHz

$3000 * 10 = 30000$ (7530)

Sending Data: 0xFE 0x00 0x00 0x75 0x30 0xAA

Set Frequency: 4000MHz

$4000 * 10 = 40000$ (9C40)

Sending Data: 0xFE 0x00 0x00 0x9C 0x40 0xAA

Set Frequency: 5000MHz

$5000 * 10 = 50000$ (C350)

Sending Data: 0xFE 0x00 0x00 0xC3 0X50 0xAA

Set Frequency: 6000MHz

$6000 * 10 = 60000$ (EA60)

Sending Data: 0xFE 0x00 0x00 0xEA 0x60 0xAA