



## Flywire Broadband Conical Inductors

### FEATURES

- ◆ Broadband performance over 53+ GHz
- ◆ Low insertion loss across all frequency bands
- ◆ High inductance, excellent current and ling capability
- ◆ Suitable for small volumes and surface mount applications

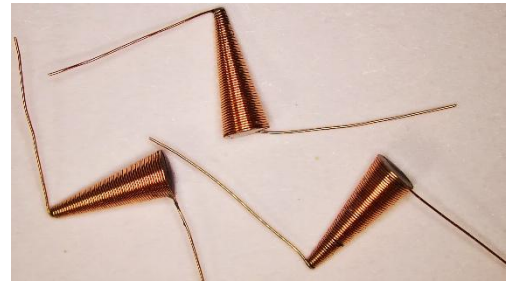

### STRUCTURAL DIAGRAM

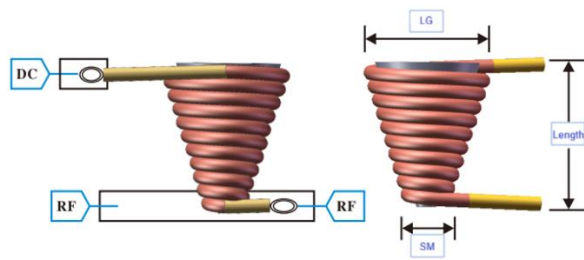



#### Not drawn to scale

Large end coil can realize insulation stripping within conventional 2.0mm range

Small end coil can realize insulation stripping within conventional 1.5mm range

Dual-terminal insulation stripping can be customized with unconventional indexes

### FREQUENCY RESPONSE

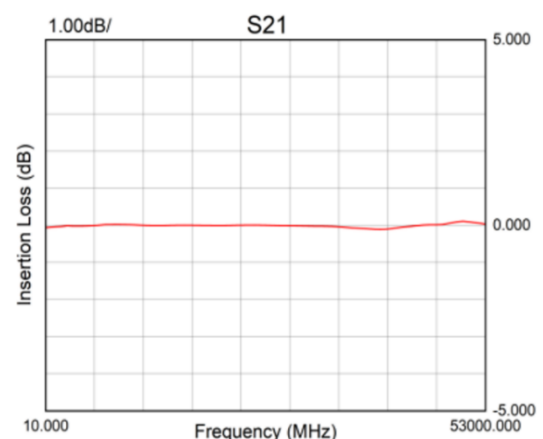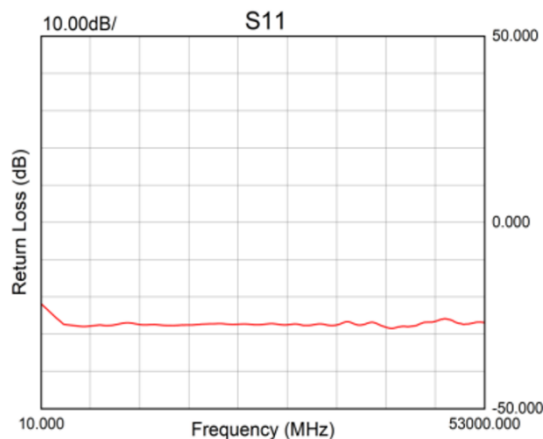

### ORDER INFORMATION

**VMV0602M0037N2850-AB**

**A: Processing procedure of pin line**  
Y: Direct weld paint cladding (default)  
W: unpainted cladding  
G: Gold plating of pin line

**B: The length of pin line (mm)**  
05: 5mm  
10: 10mm (default)  
15: 15mm