



Flywire Broadband Conical Inductors

FEATURES

- ◆ Broadband performance over 53+ GHz
- ◆ Low insertion loss across all frequency bands
- ◆ High inductance, excellent current and ling capability
- ◆ Suitable for small volumes and surface mount applications

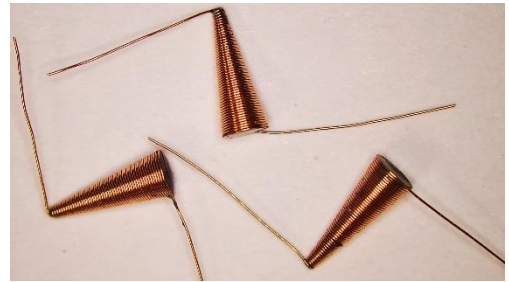

STRUCTURAL DIAGRAM

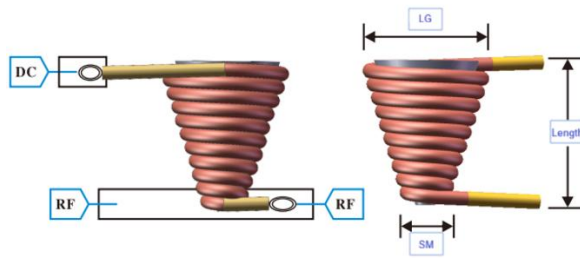



Not drawn to scale

Large end coil can realize insulation stripping within conventional 2.0mm range

Small end coil can realize insulation stripping within conventional 1.5mm range

Dual-terminal insulation stripping can be customized with unconventional indexes

FREQUENCY RESPONSE

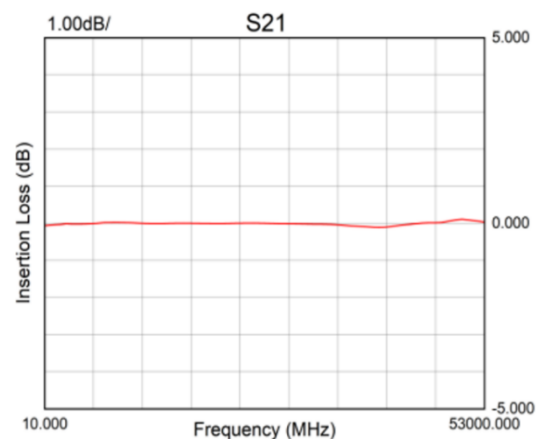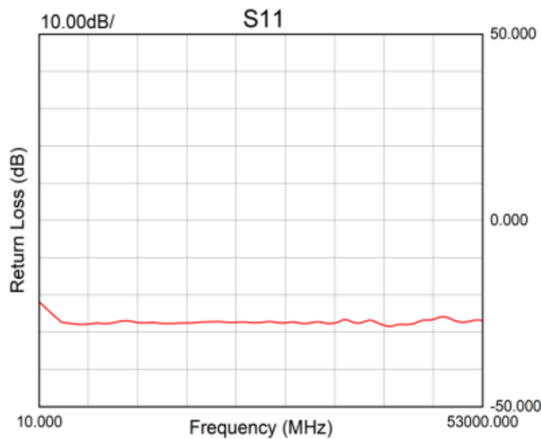

ORDER INFORMATION

VM0602M0037N2850-AB

A: Processing procedure of pin line
 Y: Direct weld paint cladding (default)
 W: unpainted cladding
 G: Gold plating of pin line

B: The length of pin line (mm)
 05: 5mm
 10: 10mm (default)
 15: 15mm